
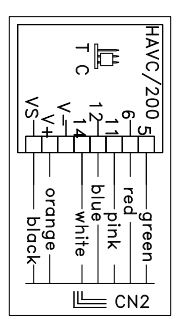
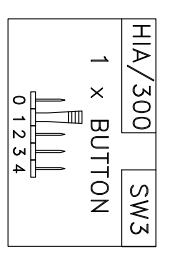



1. IT IS VITAL THAT THE CLOSING RESISTANCES SHOWN ON THE DRAWING AS 56R & 120R ARE CONNECTED AS INDICATED.

2. THE TWISTED PAIRS MUST NOT BE UNTWISTED TO SIMPLY INSERTION INTO TERMINALS. KEEP THEM TWISTED TOGETHER ALL THE WAY INTO THE TERMINALS

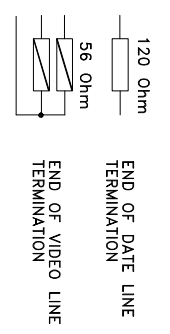

IN THIS CONFIGURATION SHOWN
 PLEASE NOTE THE MAXIMUM DISTANCE BETWEEN XA/300 AND FURTHEST MONITOR CANNOT EXCEED (100M USING 4 PAIR CAT5 + 2 CORES @ 1.0MMSQ),
 PLEASE NOTE THE MAXIMUM DISTANCE BETWEEN ENTRY PANEL AND XA/300 CANNOT EXCEED (400M USING 4 PAIR CAT5 + 1 CORE @ 1.0MMSQ)

BPT (UK) LTD. HERTS. ENGLAND	PREPARED FOR INSTALLER INFORMATION	DATE: 04/10/07	DRAWN:RC
DRAWING TITLE: 1 X 1 BUTTON TARGHA VIDEO ENTRY PANEL (DIST.150M TO 400M) & 3 OPHERA MONITORS		REVISED:	DRAWING No: C-111P3C(A)

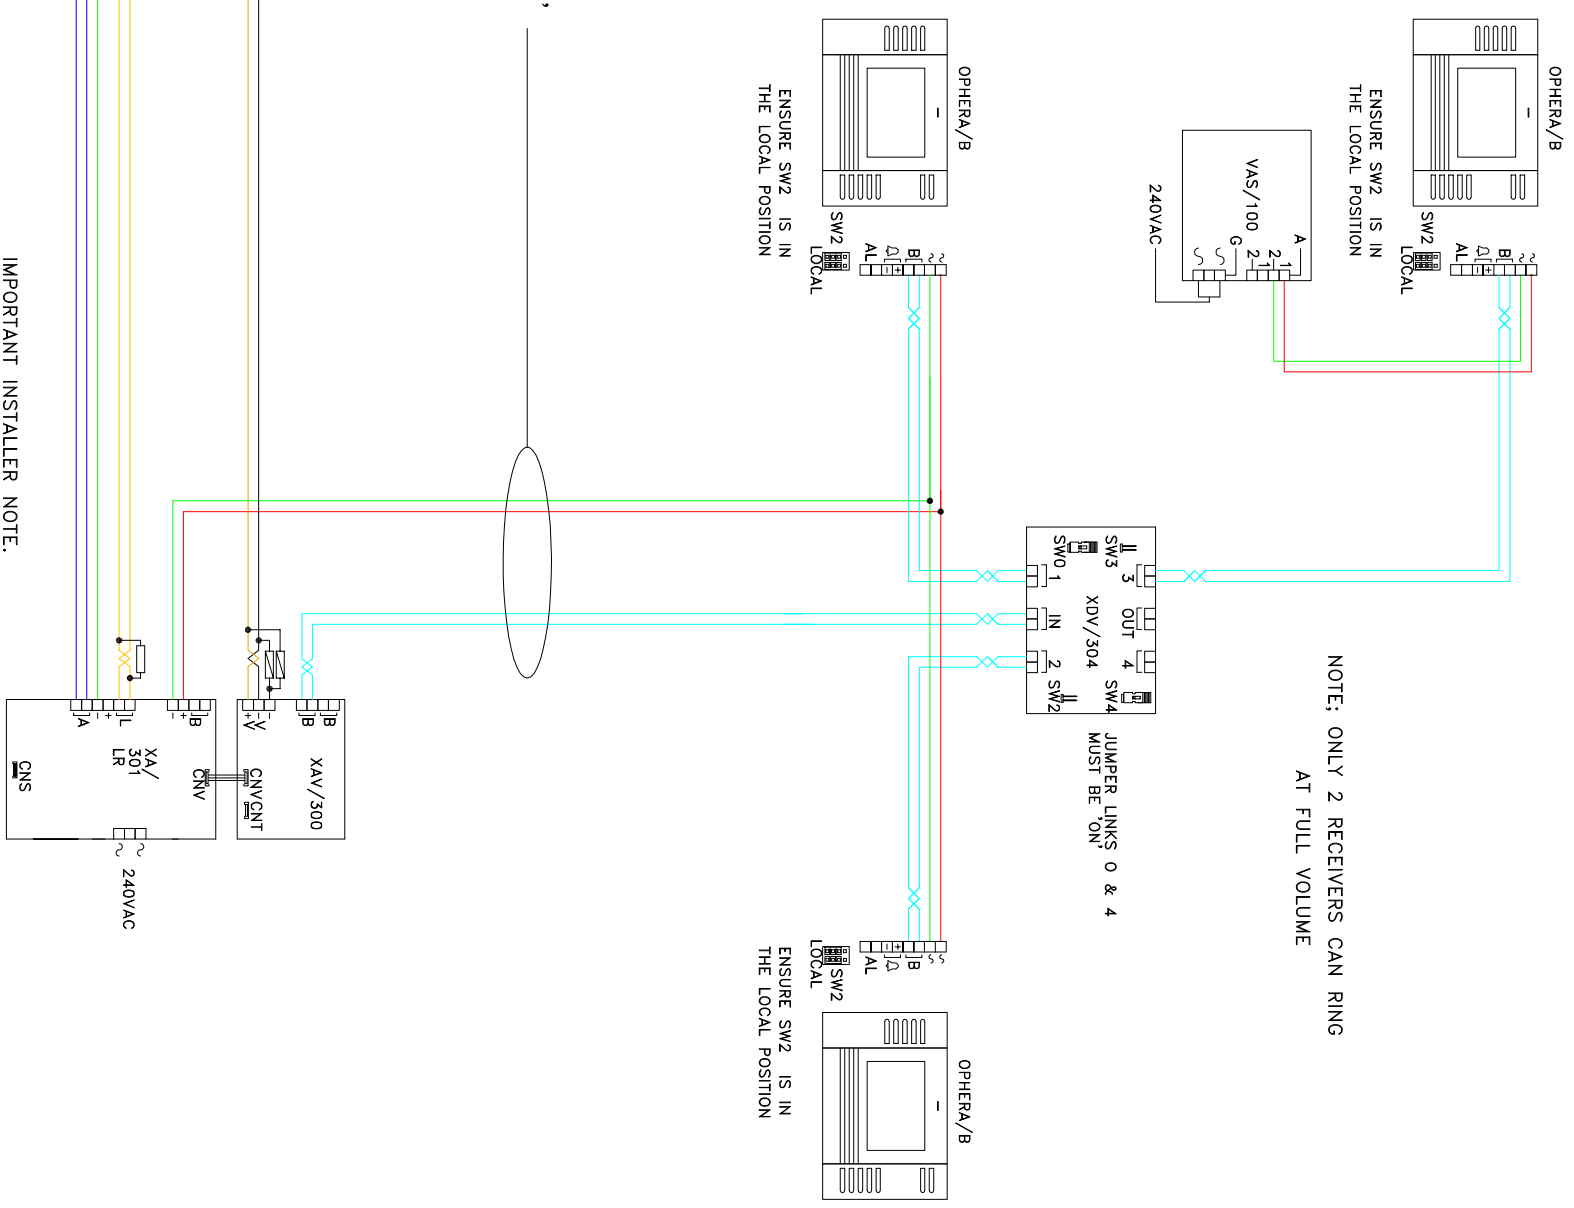

NOTE: ONLY 2 RECEIVERS CAN RING AT FULL VOLUME

IMPORTANT INSTALLER NOTE:
 ENSURE THAT SUITABLE VENTILATION IS PROVIDED IF THE XA/301 IS MOUNTED IN AN ENCLOSURE.
 ENSURE THAT THE XA/301 IS ALWAYS MOUNTED CORRECTLY WITH THE TERMINALS ON THE BOTTOM EDGE AS PER THE MANUFACTURERS INSTRUCTIONS.
 MOUNT THE XAV/300 TO THE RIGHT SIDE OF THE XA/301