




DS-CVK

Colour Video Kits



Door Entry
Direct

CVK Colour Video Kits

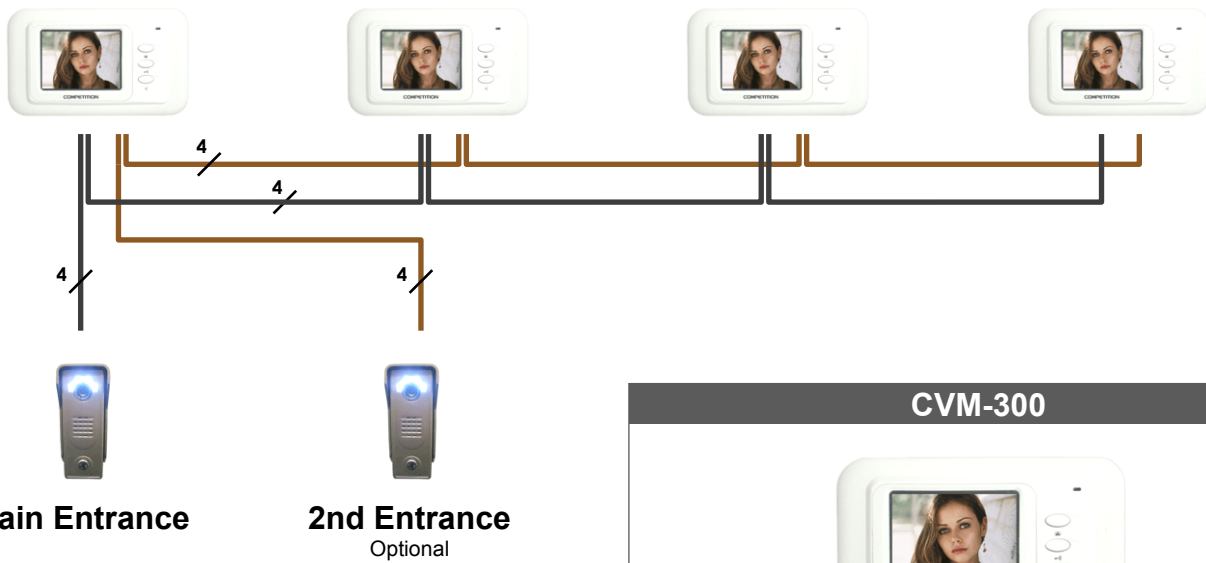

Main Entrance

2nd Entrance
Optional

- Call up to 4 monitors from 1 or 2 entrance panels
- Clear high resolution picture on 4" monitor
- Up to 3 video slave handsets
- 4 core cable to camera plus 2 core for power via transformer
- Built in call transfer feature
- DIN PSU to each monitor

CVM-300

The CVM-300 colour video monitor provides crisp colour images combined with clear sound. The system can be extended by adding up to 1 extra audio and 3 extra video handsets.

- Clear high resolution picture on 4" monitor
- Up to 3 video slave handsets
- 4 core cable to camera plus 2 core for power via transformer
- Built in call transfer feature

Dimensions :

- 113 x 190 x 43 mm (hwd)

CVP01S

- CCD 420 TVL
- Surface mounted
- Robust design suitable for external use
- fully waterproof - IP55

Dimensions :

- 130 x 55 x 39 mm (hwd)

CVP01S/05

- CCD 420 TVL
- Surface mounted
- Robust design suitable for external use
- fully waterproof - IP55
- Illuminated access control keypad

Dimensions :

- 190 x 75 x 45 mm (hwd)

CVP01VR

- CCD 420 TVL
- Flush mounted
- Vandal Resistant design suitable for external use
- fully waterproof - IP55

Dimensions :

- 204 x 150 x 43 mm (hwd)

CVP01VR/05

- CCD 420 TVL
- Flush mounted
- Surface frame available (CVPSM)
- Robust design suitable for external use
- fully waterproof - IP55
- Illuminated access control keypad

Dimensions :

- 250 x 120 x 43 mm (hwd)