

NOTE:
THIS DRAWING INDICATES AND ASSUMES THE USE OF
BPT COMPOSITE CABLES OR A SUITABLE EQUIVALENT.

ENSURE ALL ADDITIONAL CONNECTIONS ARE
A MINIMUM OF 0.5MM CSA PER CORE.


NOTE; CABLE EQUIVALENTS

VCM/130 = RG59 COAX + 4 CORES @ 1.0MMSQ + 8 CORES @ 0.5MMSQ

VCM/60 = RG59 COAX + 2 CORES @ 1.0MMSQ + 3 CORES @ 0.5MMSQ

VCM/60 (FOR 50M)

VCM/130 (FOR 150M)

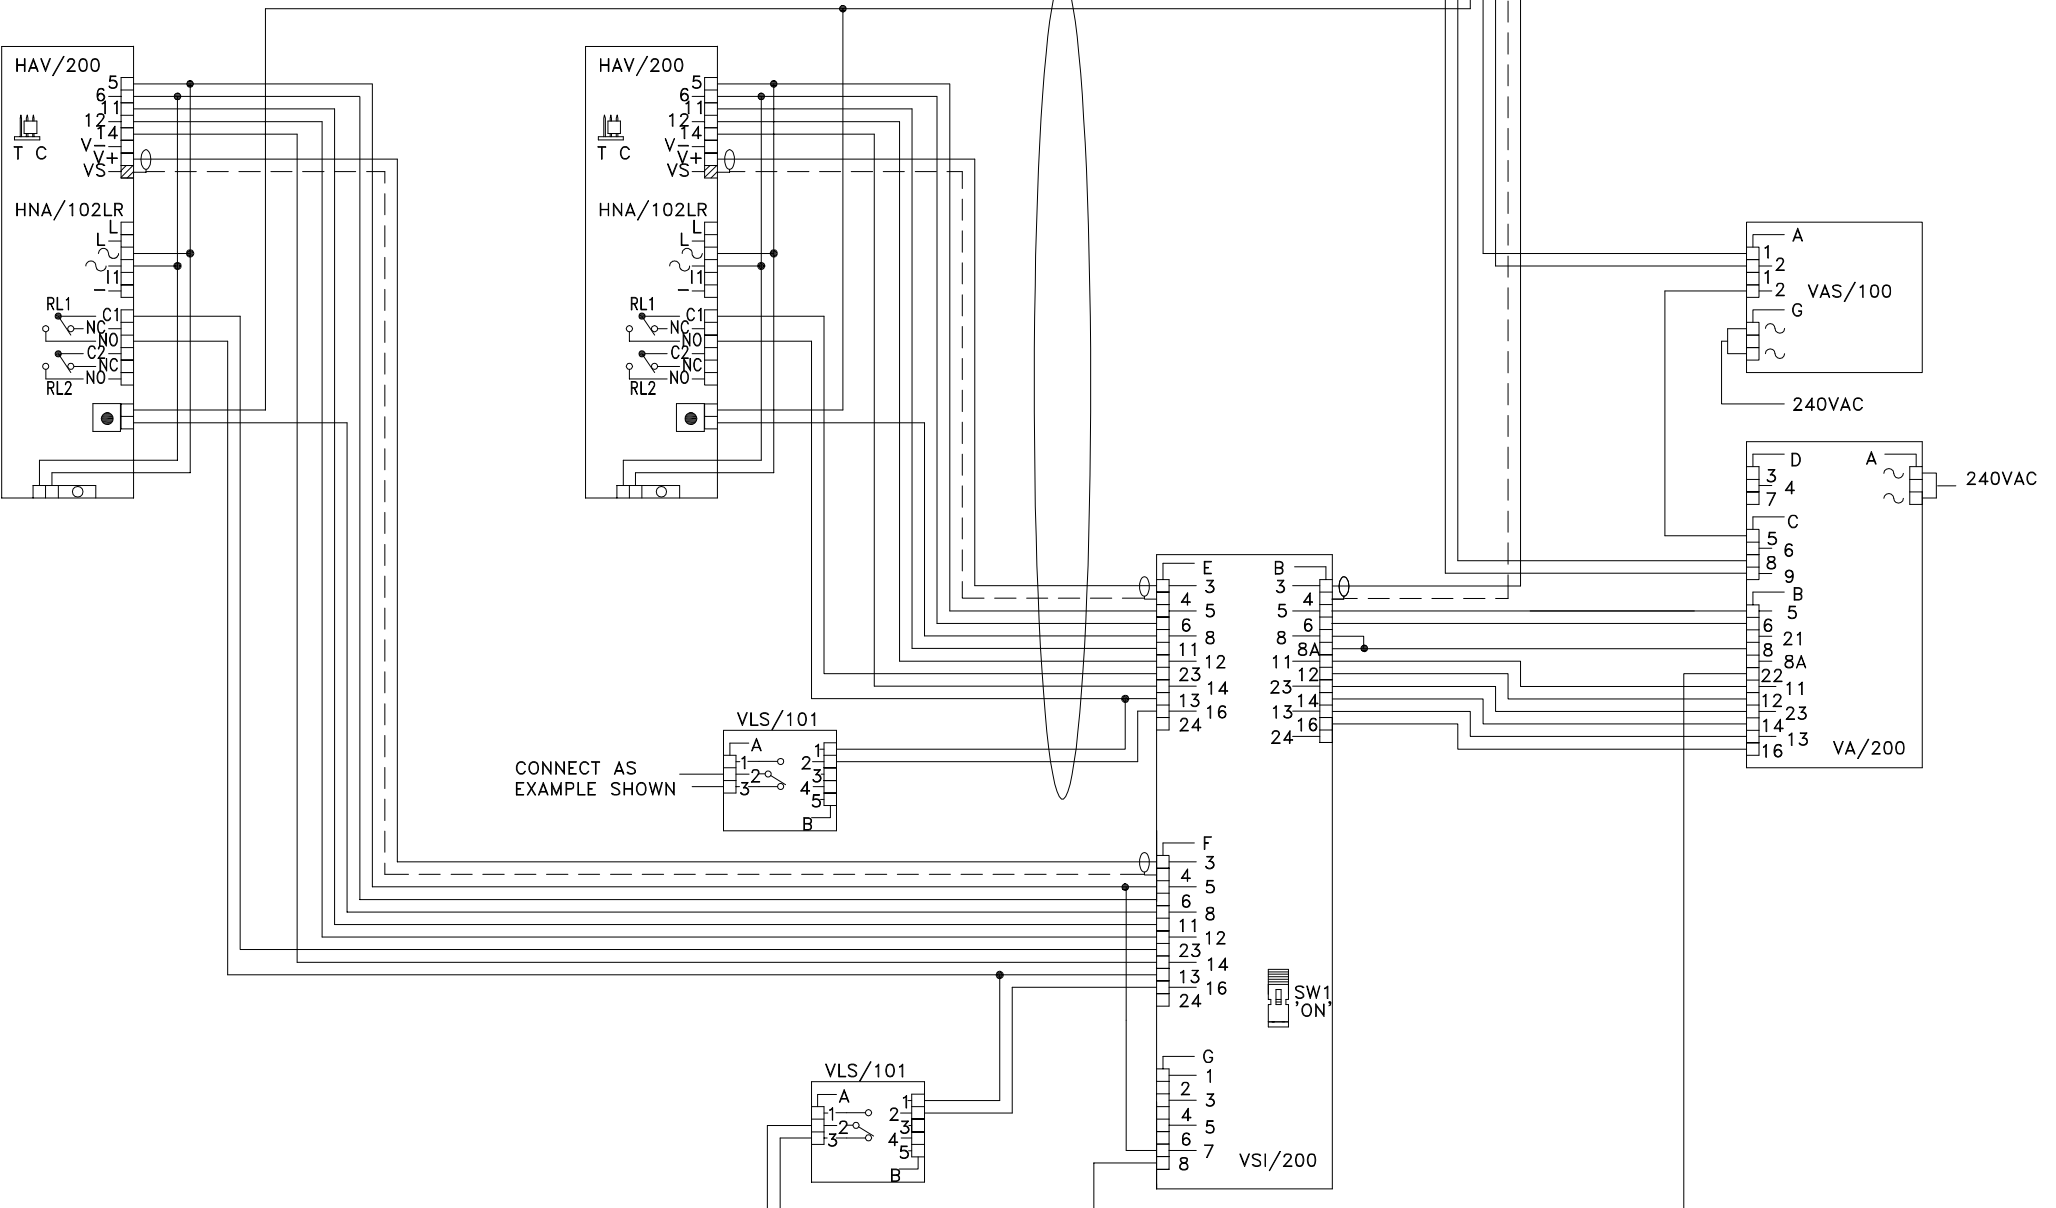

EXAMPLE MAGLOCK CONNECTIONS

IT IS VERY IMPORTANT THAT A SUPPRESSION DEVICE BE FITTED
DIRECTLY ACROSS THE DC RELEASE SUPPLY LINES. IF THE
RELEASE IS NOT INTERNALLY SUPPRESSED USE A 1N4003



BPT (UK) LTD.
HERTS. ENGLAND

PREPARED FOR
INSTALLER INFORMATION

DATE: 11/05/07 DRAWN:RC

REVISED:

DRAWING TITLE:

SINGLE HOUSE INSTALLATION USING 2 TARGHA VIDEO ENTRY
PANELS WITH KEYPADS & 3 LYNEA MONITORS + MAGLOCKS

DRAWING No: B-1T2Y3UK