


NOTE:
ENSURE DIP SWITCH 3 IS 'ON'

NOTE: CABLE EQUIVALENTS


VCM/130 = RG59 COAX + 4 CORES @ 1.0MMSQ + 8 CORES @ 0.5MMSQ
 VCM/60 = RG59 COAX + 2 CORES @ 1.0MMSQ + 3 CORES @ 0.5MMSQ

NOTE:
THIS DRAWING INDICATES AND ASSUMES THE USE OF
BPT COMPOSITE CABLES OR A SUITABLE EQUIVALENT.

ENSURE ALL ADDITIONAL CONNECTIONS ARE
A MINIMUM OF 0.5MM CSA PER CORE.

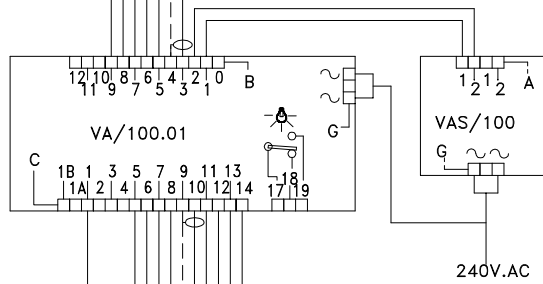

VCM/130 (FOR 150M)

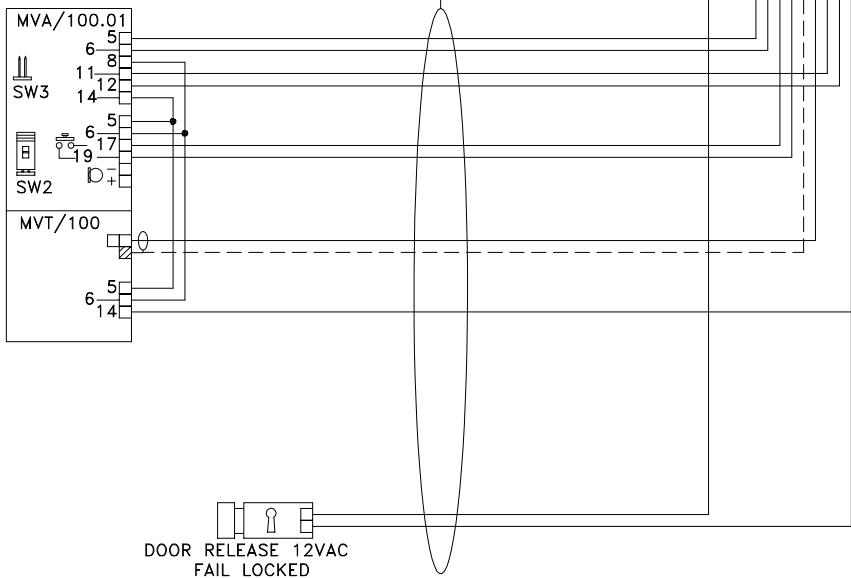

DOOR RELEASE 12VAC
FAIL LOCKED

BPT (UK) LTD. HERTS. ENGLAND	PREPARED FOR	DATE: 12/01/07	DRAWN: RC
	INSTALLER INFORMATION	REVISED:	
DRAWING TITLE:	1 X 1 BUTTON MODULAR VIDEO ENTRY PANEL & 1 X VM/100 MONITOR	DRAWING No: A-1M1V1L	