


TO FURTHER MONITORS AND
VAV400P'S AS REQUIRED

75 Ohm

ENSURE LAST VAV/400P IN/OUT
BLOCK HAS A 75 Ohm RESISTOR
FITTED ACROSS TERMINALS 3 & 4.

CALL LINES TO FURTHER
MONITORS

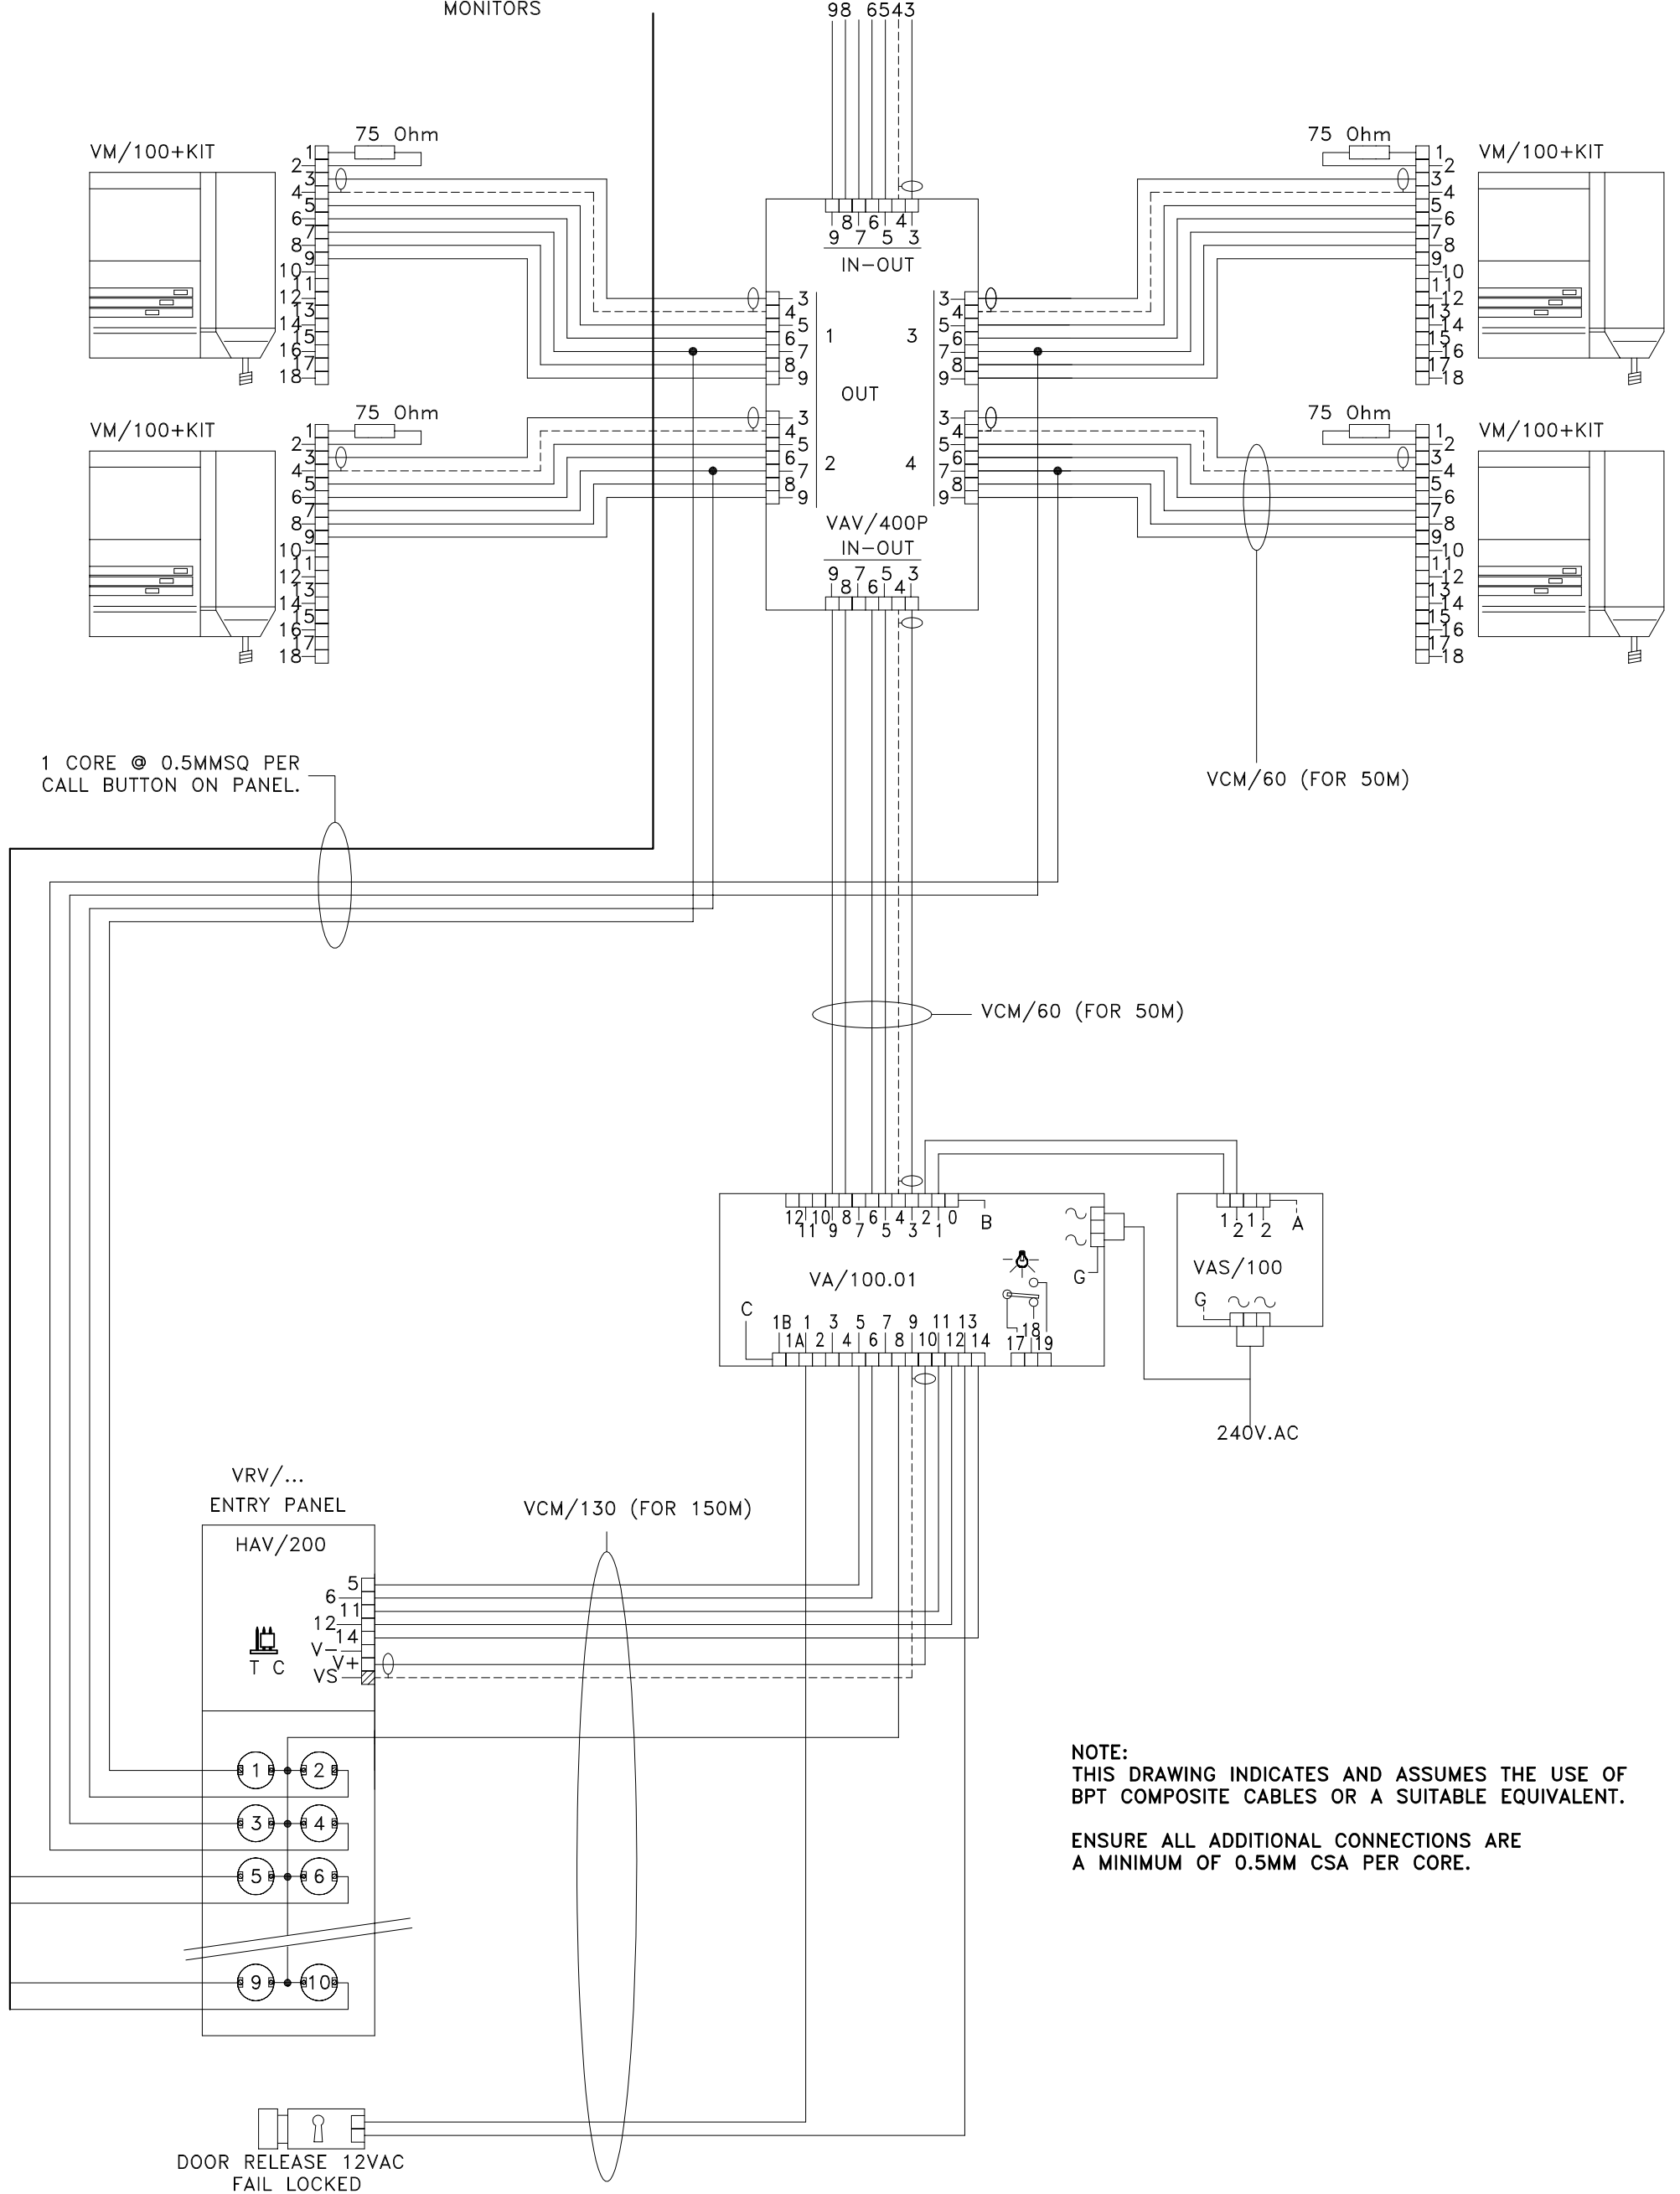

NOTE:
THIS DRAWING INDICATES AND ASSUMES THE USE OF
BPT COMPOSITE CABLES OR A SUITABLE EQUIVALENT.

ENSURE ALL ADDITIONAL CONNECTIONS ARE
A MINIMUM OF 0.5MM CSA PER CORE.

NOTE; CABLE EQUIVALENTS

VCM/130 = RG59 COAX + 4 CORES @ 1.0MMSQ + 8 CORES @ 0.5MMSQ

VCM/60 = RG59 COAX + 2 CORES @ 1.0MMSQ + 3 CORES @ 0.5MMSQ

BPT (UK) LTD. HERTS. ENGLAND	PREPARED FOR	DATE: 06/01/03	DRAWN: RC
	INSTALLER INFORMATION	REVISED:	
DRAWING TITLE:	1 X 10 BUTTON VR VIDEO ENTRY PANEL & VM100 MONITORS		DRAWING No: A-10V1VNL