


CALL LINES TO FURTHER MONITORS

TO FURTHER MONITORS AND VAV400P'S AS REQUIRED

75 Ohm

ENSURE LAST VAV/400P IN/OUT BLOCK HAS A 75 Ohm RESISTOR FITTED ACROSS TERMINALS 3 & 4.

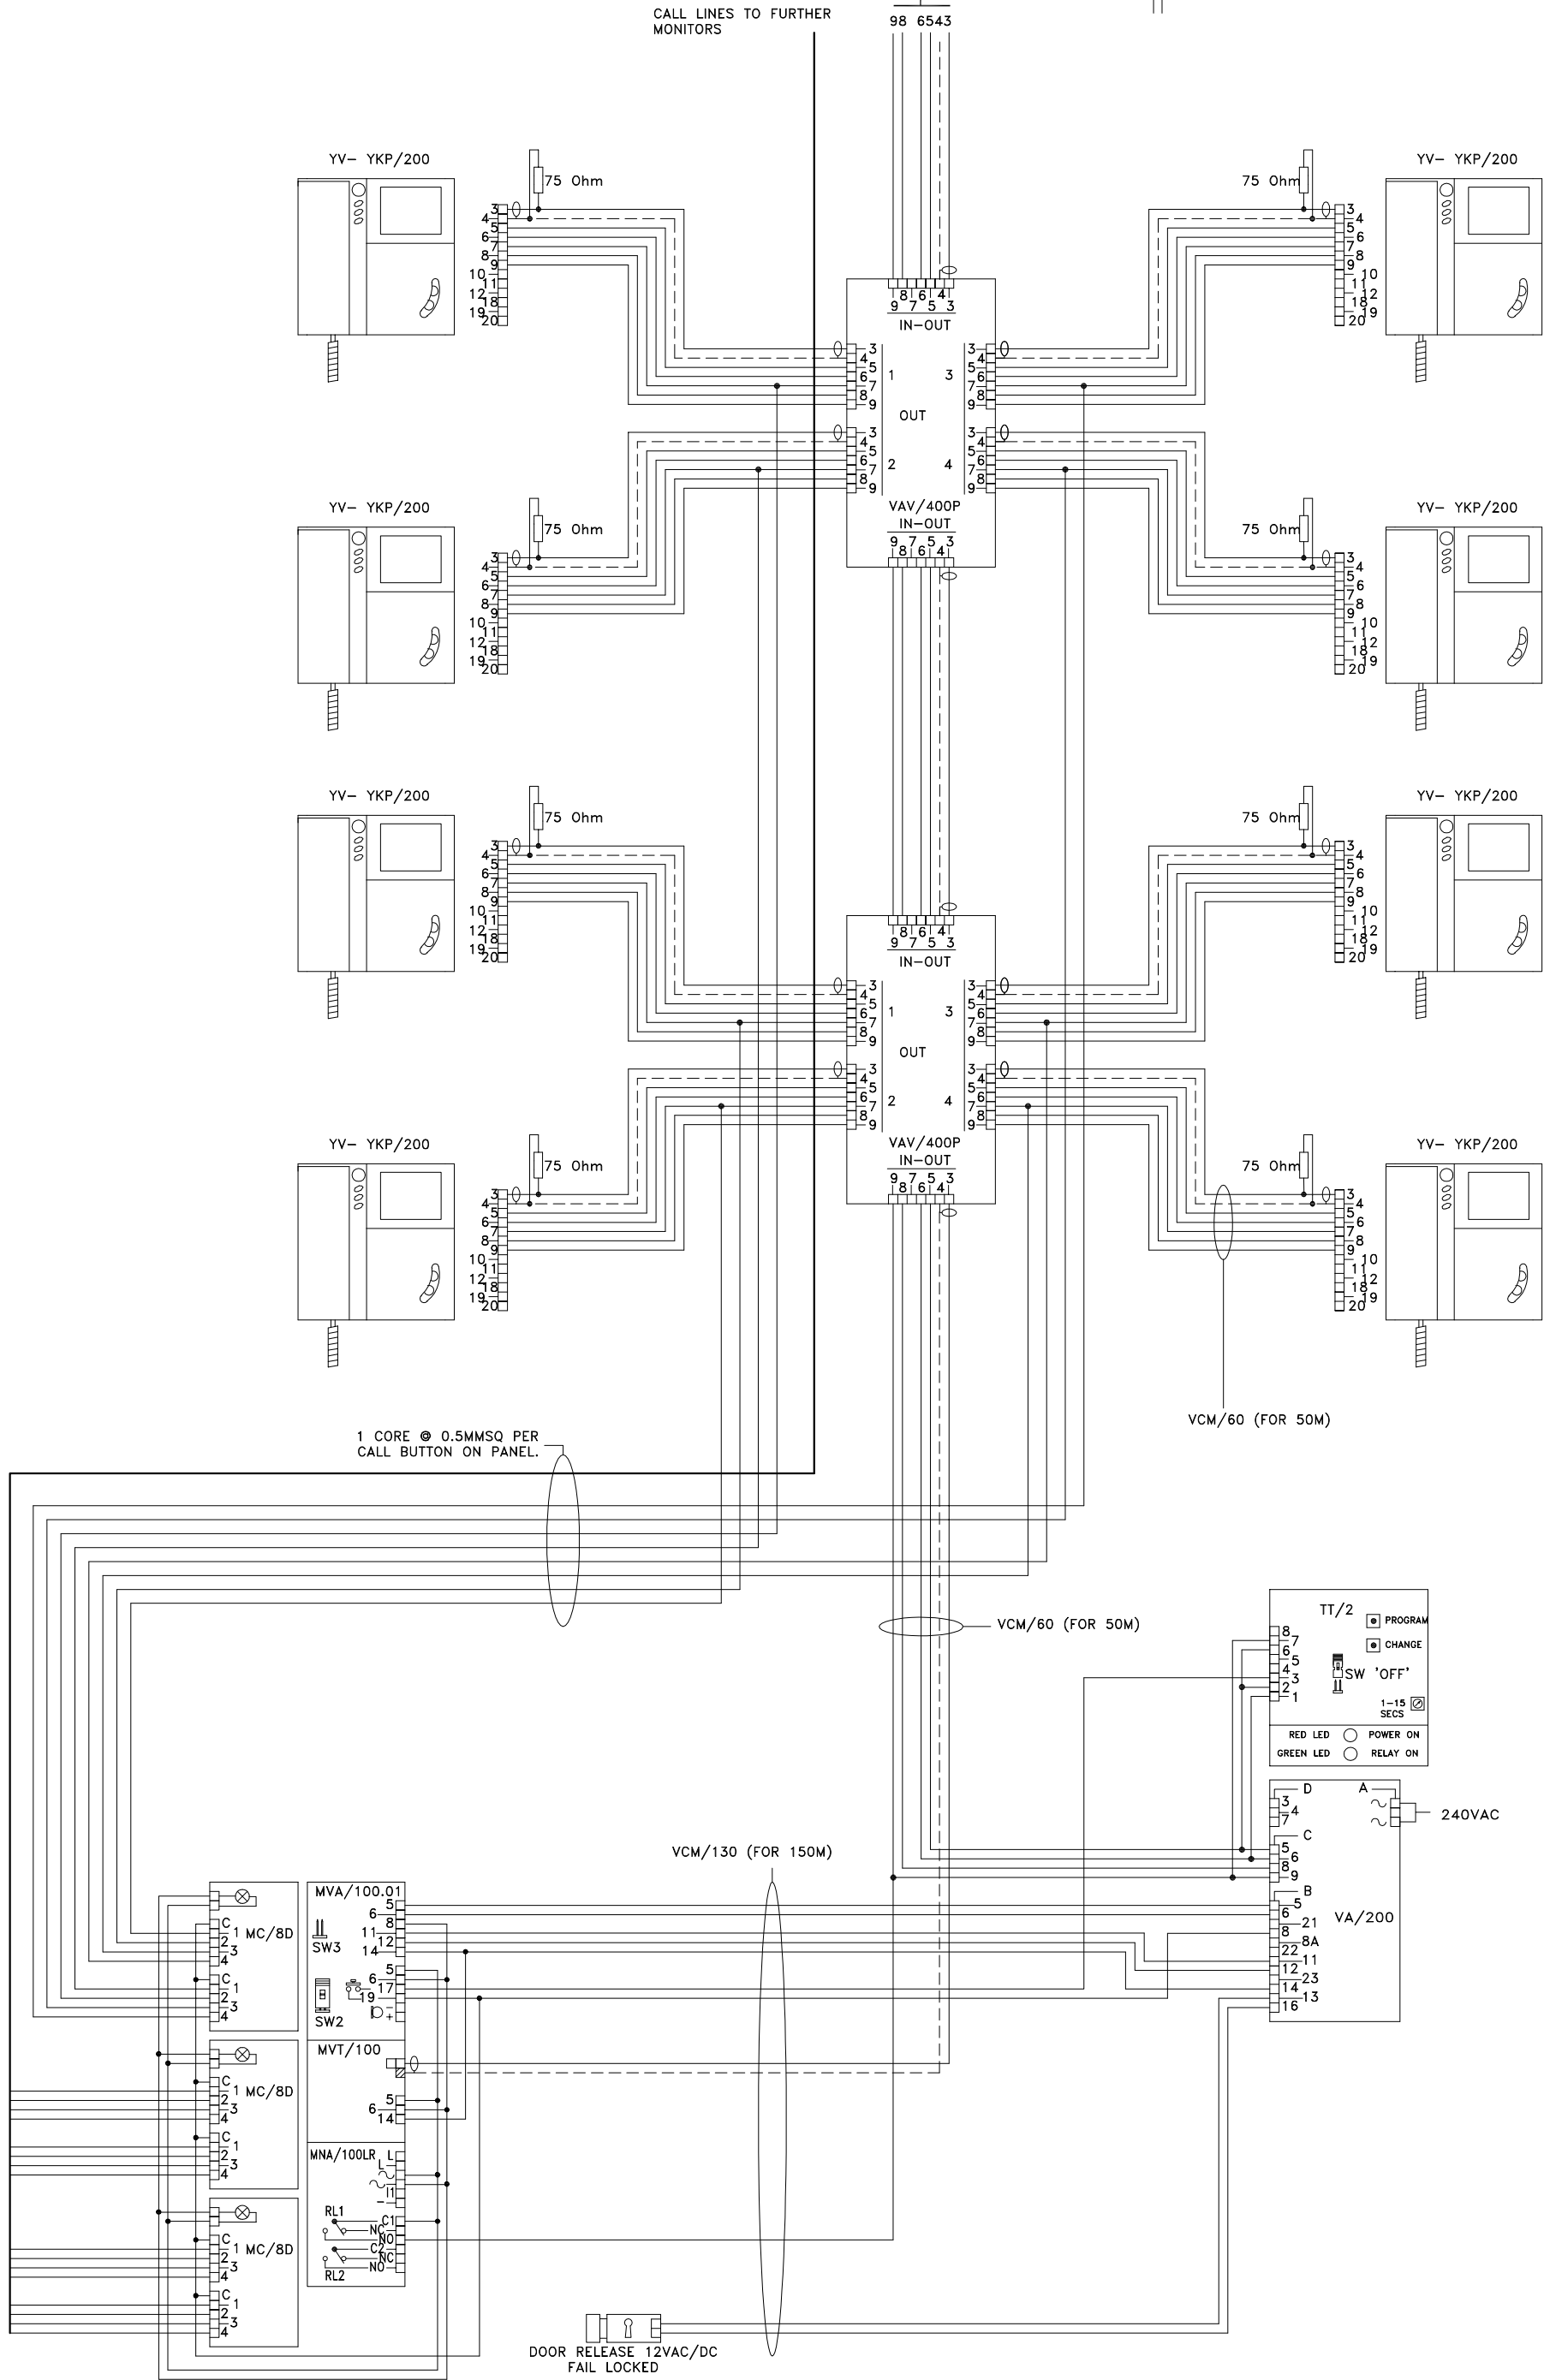

1 CORE @ 0.5MMSQ PER CALL BUTTON ON PANEL.

VCM/60 (FOR 50M)

VCM/60 (FOR 50M)

VCM/130 (FOR 150M)

NOTE: CABLE EQUIVALENTS

VCM/130 = RG59 COAX + 4 CORES @ 1.0MMSQ + 8 CORES @ 0.5MMSQ
 VCM/60 = RG59 COAX + 2 CORES @ 1.0MMSQ + 3 CORES @ 0.5MMSQ

BPT (UK) LTD. HERTS. ENGLAND	PREPARED FOR INSTALLER INFORMATION	DATE: 21/01/05	DRAWN: RC
DRAWING TITLE:	1 X MULTI-BUTTON MODULAR VIDEO ENTRY PANEL WITH KEYPAD, TRADES & LYNEA MONOCHROME MONITORS	REVISED: DRAWING No: B-NM1YNLKT	