


NOTE:
THIS DRAWING INDICATES AND ASSUMES THE USE OF
BPT COMPOSITE CABLES OR A SUITABLE EQUIVALENT.
ENSURE ALL ADDITIONAL CONNECTIONS ARE
A MINIMUM OF 0.5MM CSA PER CORE.

NOTE: CABLE EQUIVALENTS
VCM/130 = RG59 COAX + 4 CORES @ 1.0MMSQ + 8 CORES @ 0.5MMSQ
VCM/60 = RG59 COAX + 2 CORES @ 1.0MMSQ + 3 CORES @ 0.5MMSQ

1 CORE @ 0.5MMSQ PER
CALL BUTTON ON PANEL.

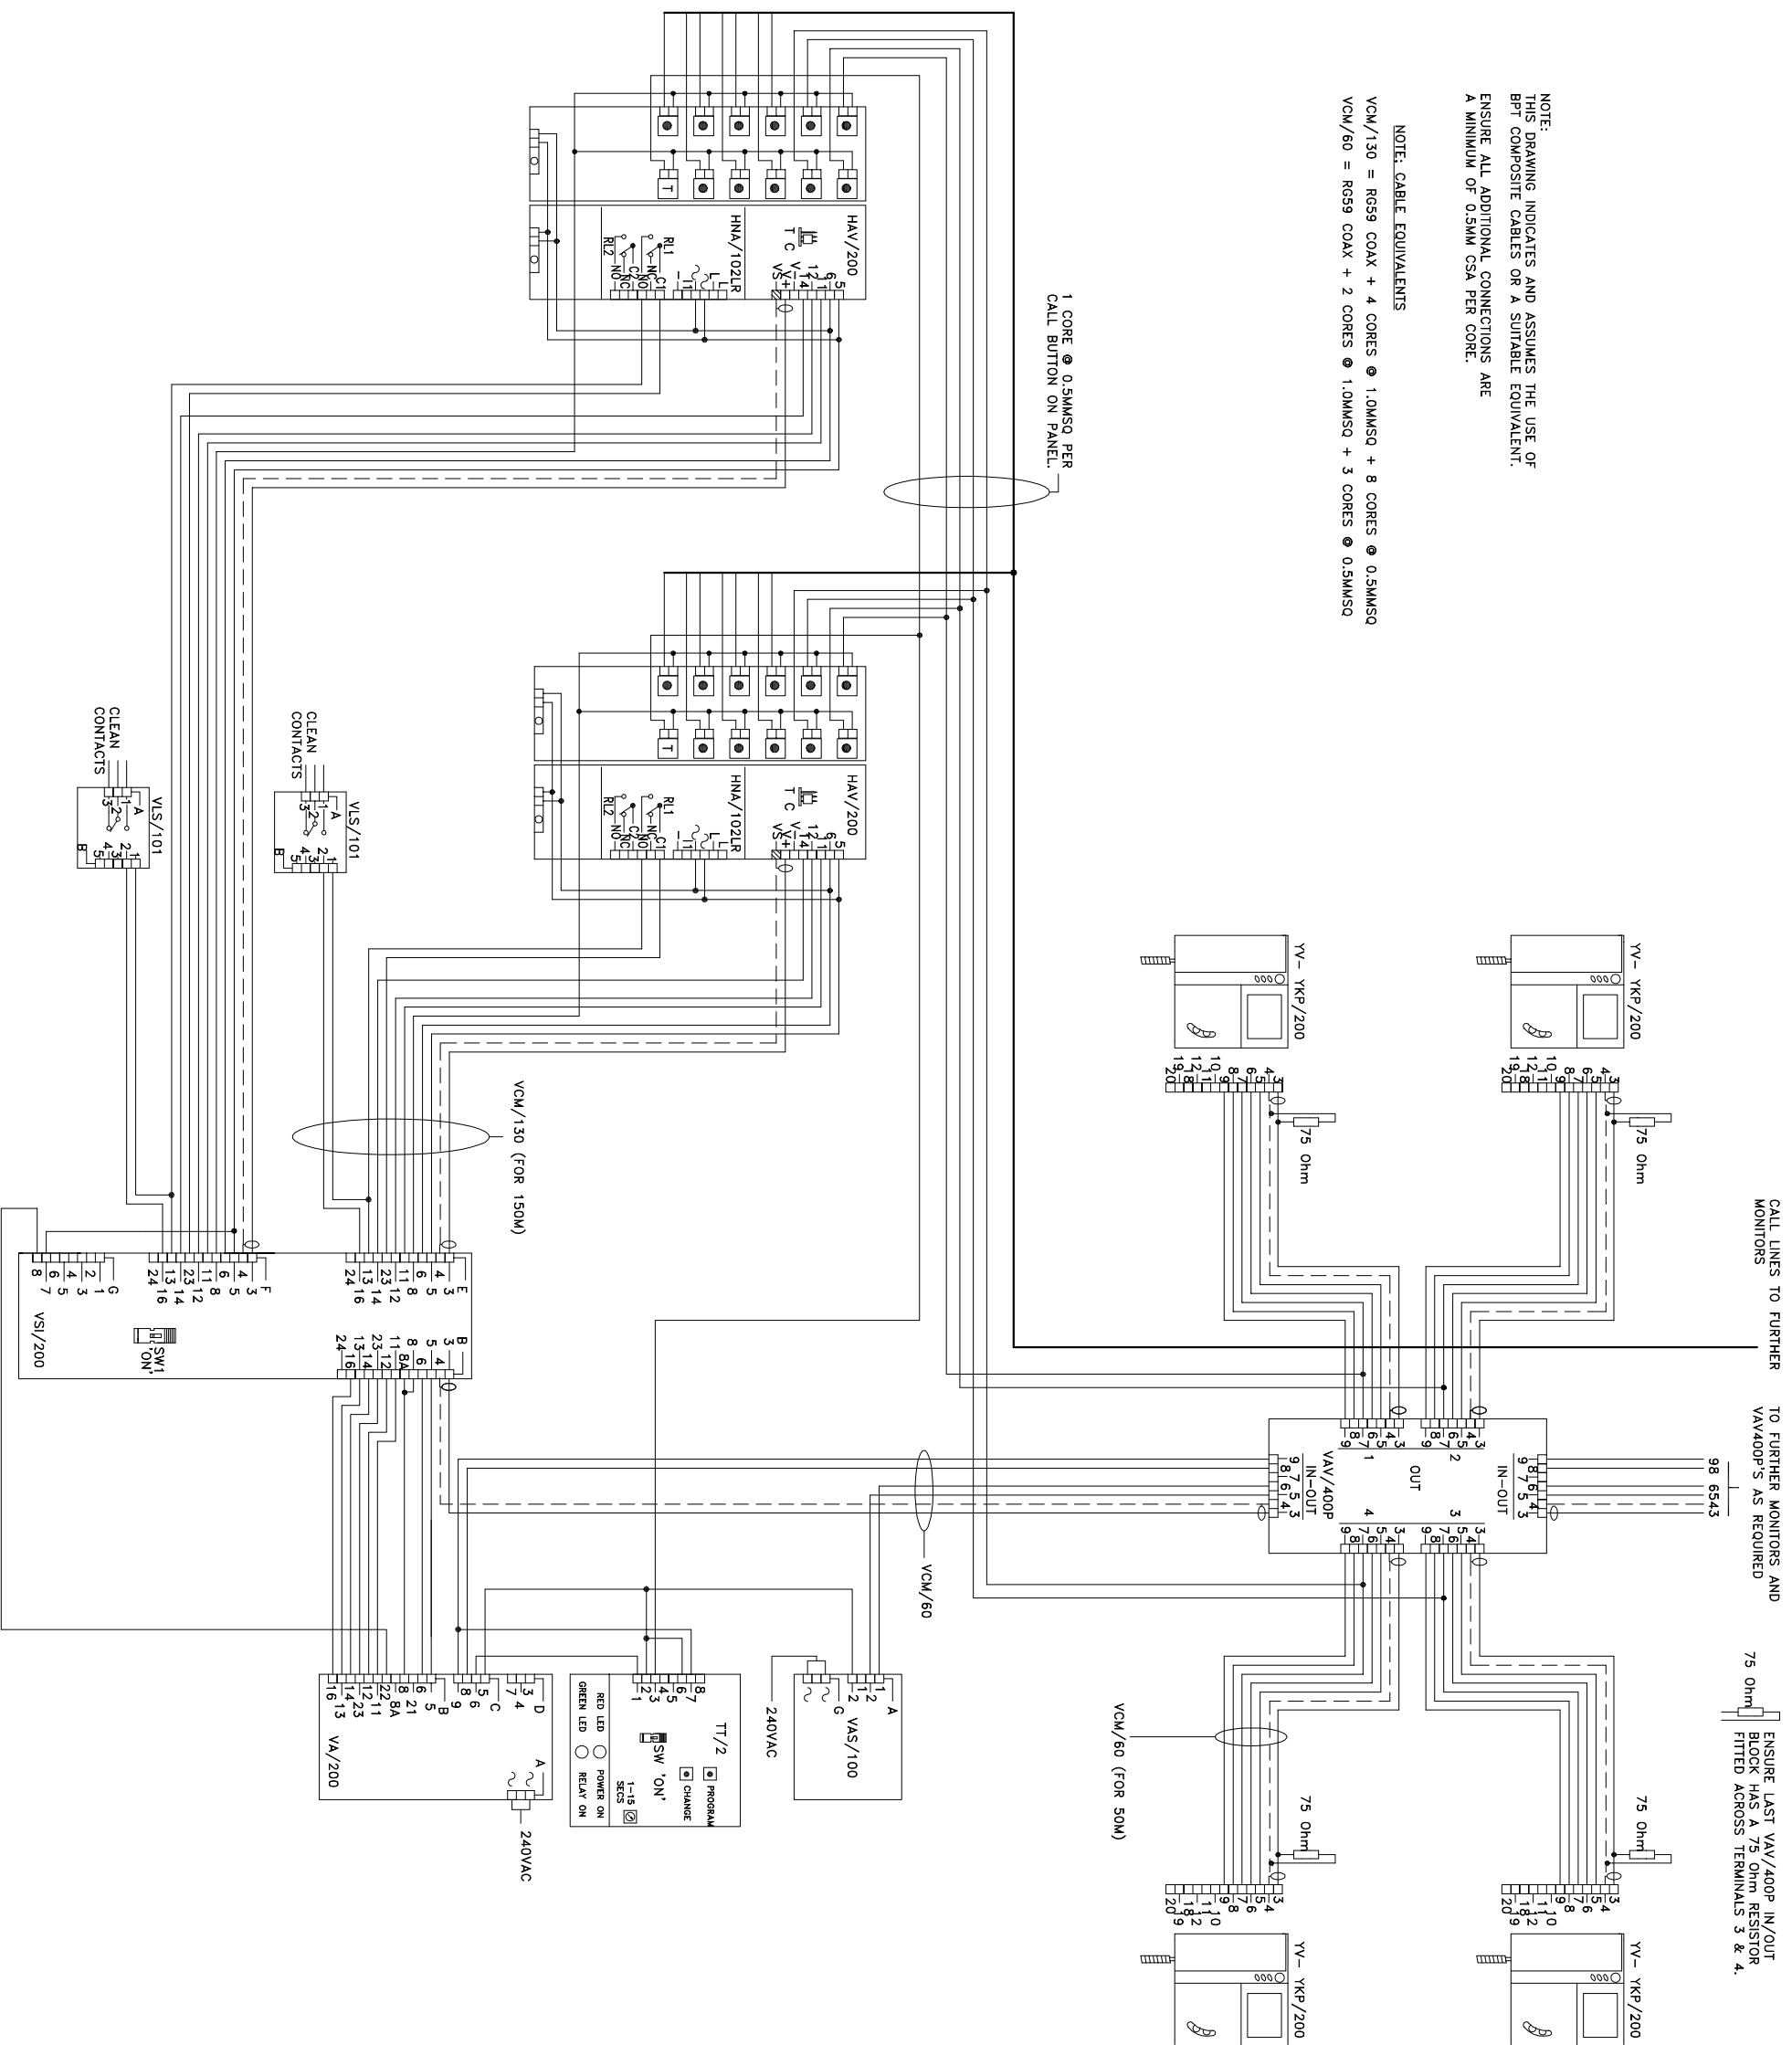

CALL LINES TO FURTHER
MONITORS TO FURTHER MONITORS AND
VAV400P'S AS REQUIRED
75 Ohm
ENSURE LAST VAV/400P IN/OUT
BLOCK HAS A 75 Ohm RESISTOR
FITTED ACROSS TERMINALS 3 & 4.

BPT (UK) LTD. HERTS. ENGLAND	PREPARED FOR INSTALLER INFORMATION	DATE: 20/11/06	DRAWN:RC
DRAWING TITLE: 2 X MULTI-BUTTON TARGHA VIDEO ENTRY PANELS WITH KEYPADS, TRADES & LYNEA MONOCHROME MONITORS		REVISED:	
		DRAWING No: B-NT2YNCKTT	