

INAN5498S 20100310

local power supply - installation instructions

Mounting the unit

Secure the unit to a DIN rail or screw and fix through the two holes.

General

The AN5498S is an additional PSU for SRS video door entry systems. One is required to illuminate one further monitor. Only 2 monitors can be called from one call button. You will also require the use of video distributors (AN0606) to split the video signals.

Operation

The purpose of the AN5498S is to boost the current capability of the video monitor power supply line (R1 & R2). Each AN5498S should be mounted in reasonable proximity to the video monitor it is to serve.

Output Connection

1 is commoned into terminal 1 of the AN5498S. The 3M terminal connects to the secondary video monitor. Terminal 3C connects to R2 on the 9008V2 or 3 on the primary monitor.

Power Connection

This unit may be connected to a 230VAC single phase mains power supplies.

EC Compliance

This item has been classified as a component' and is not within the scope of the EMC directive 89/336/EEC.


Technical Data

Dimensions (HWD)	130 x 100 x 68
Temperature	0 ~ +40°C
Operating Voltage	240 VAC
Current rating	1A ~ nominal DC
Timer	set by 9008V2.

Warranty

The unit is supplied with 12 months warranty against defects in manufacture.

CW1308 telephone cable

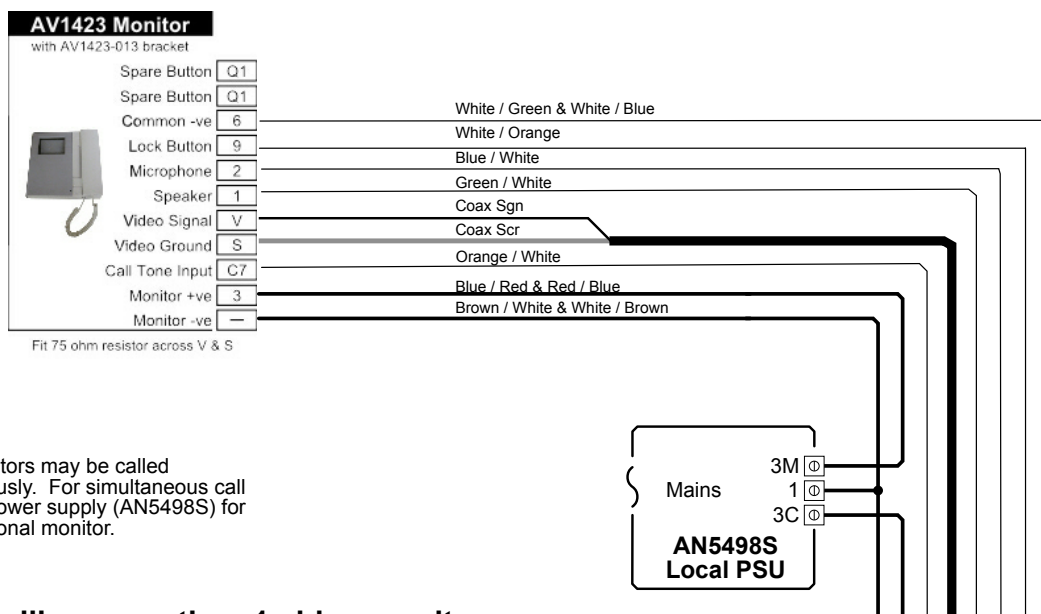

Three monitors may be called simultaneously. For simultaneous call add local power supply (AN5498S) for each additional monitor.

fig. 3 calling more than 1 video monitor