


NOTE: ENSURE ON THE LAST VDX/400 LINKS 3-R & 4-R ARE MADE.

NOTE:  
THIS DRAWING INDICATES AND ASSUMES THE USE OF BPT COMPOSITE CABLES OR A SUITABLE EQUIVALENT.  
ENSURE ALL ADDITIONAL CONNECTIONS ARE A MINIMUM OF 0.5MM CSA PER CORE.

2. ENSURE ALL CORES 5&6 ARE 1.0MMSQ THROUGHOUT THIS INSTALLATION

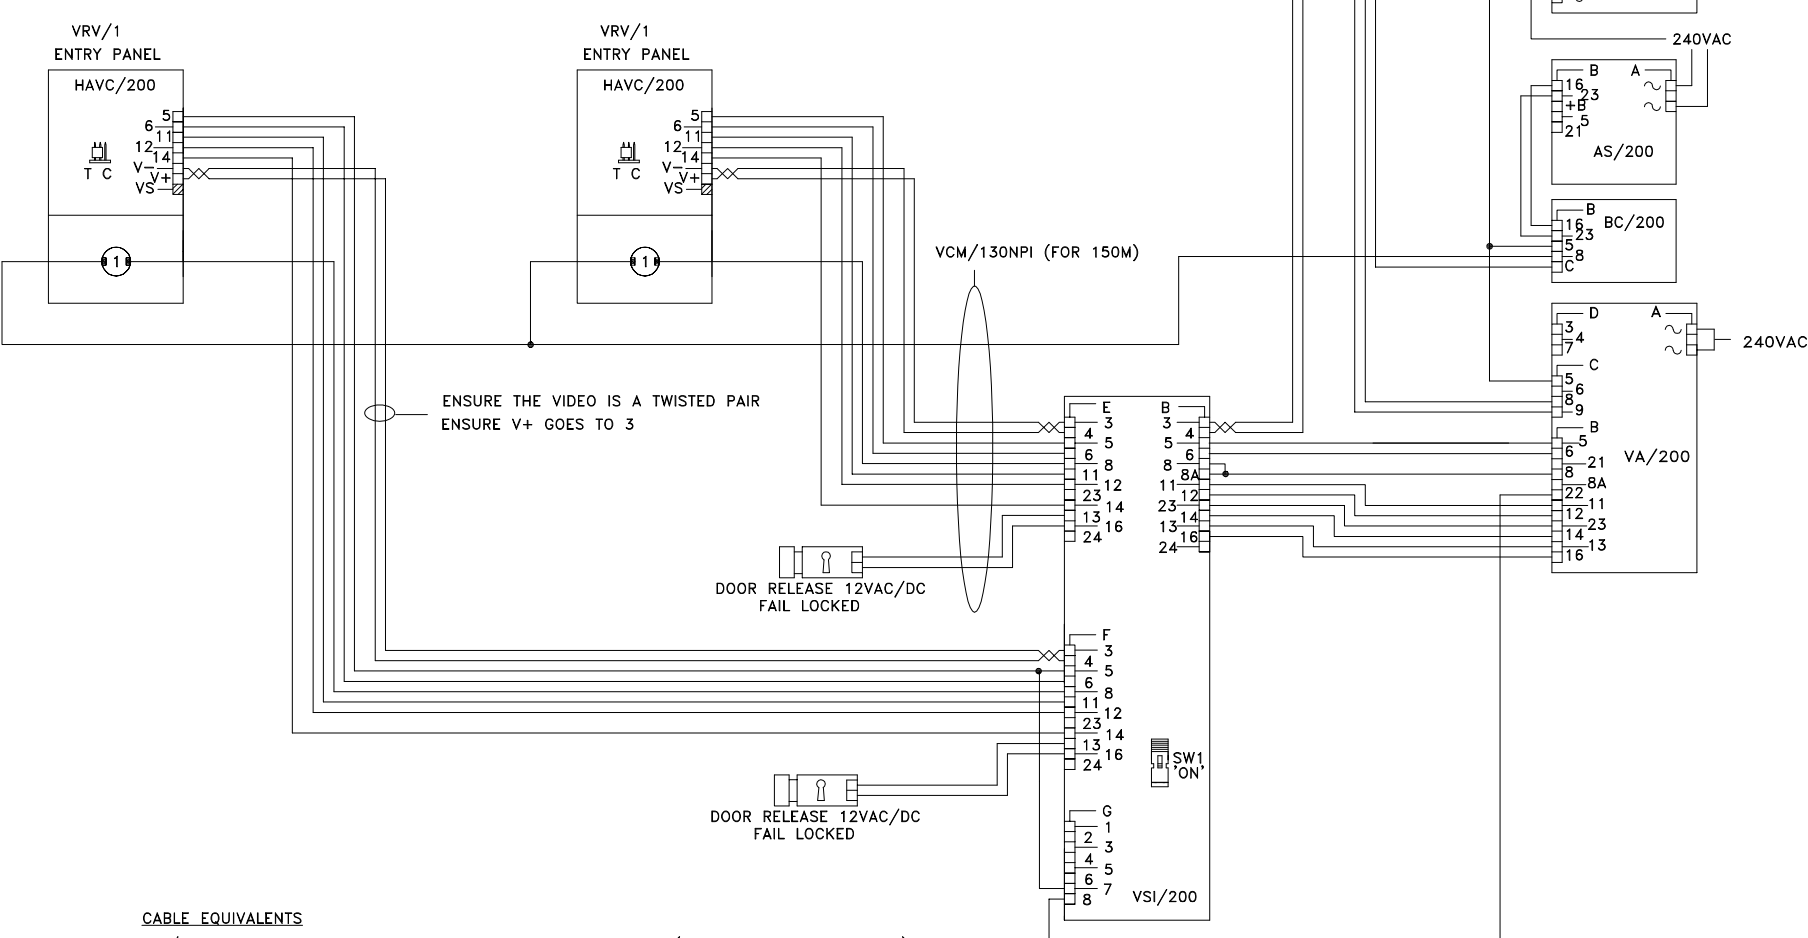

ENSURE THE VIDEO IS A TWISTED PAIR  
ENSURE V+ GOES TO 3

CABLE EQUIVALENTS  
VCM/130NPI. = 4 CORES @ 1.0MMSQ + 10 CORES @ 0.5MMSQ (INCLUDING 1 TWISTED PAIR)  
VCM/60NPI. = 2 CORES @ 1.0MMSQ + 8 CORES @ 0.5MMSQ (INCLUDING 1 TWISTED PAIR)

BPT (UK) LTD. HERTS. ENGLAND	PREPARED FOR INSTALLER INFORMATION	DATE: 26/01/05	DRAWN:RC
		REVISED:	
DRAWING TITLE:	2 X 1 BUTTON VR VIDEO ENTRY PANELS & 4 NOVA MONITORS USING TWISTED PAIR VIDEO DISTRIBUTION	DRAWING No: B-1V2N4L(TP)	