



NOTE:  
THIS DRAWING INDICATES AND ASSUMES THE USE OF  
A MINIMUM OF 0.5MM CSA PER CORE.

CALL LINES TO FURTHER  
HANDSETS

TO FURTHER HANDSETS

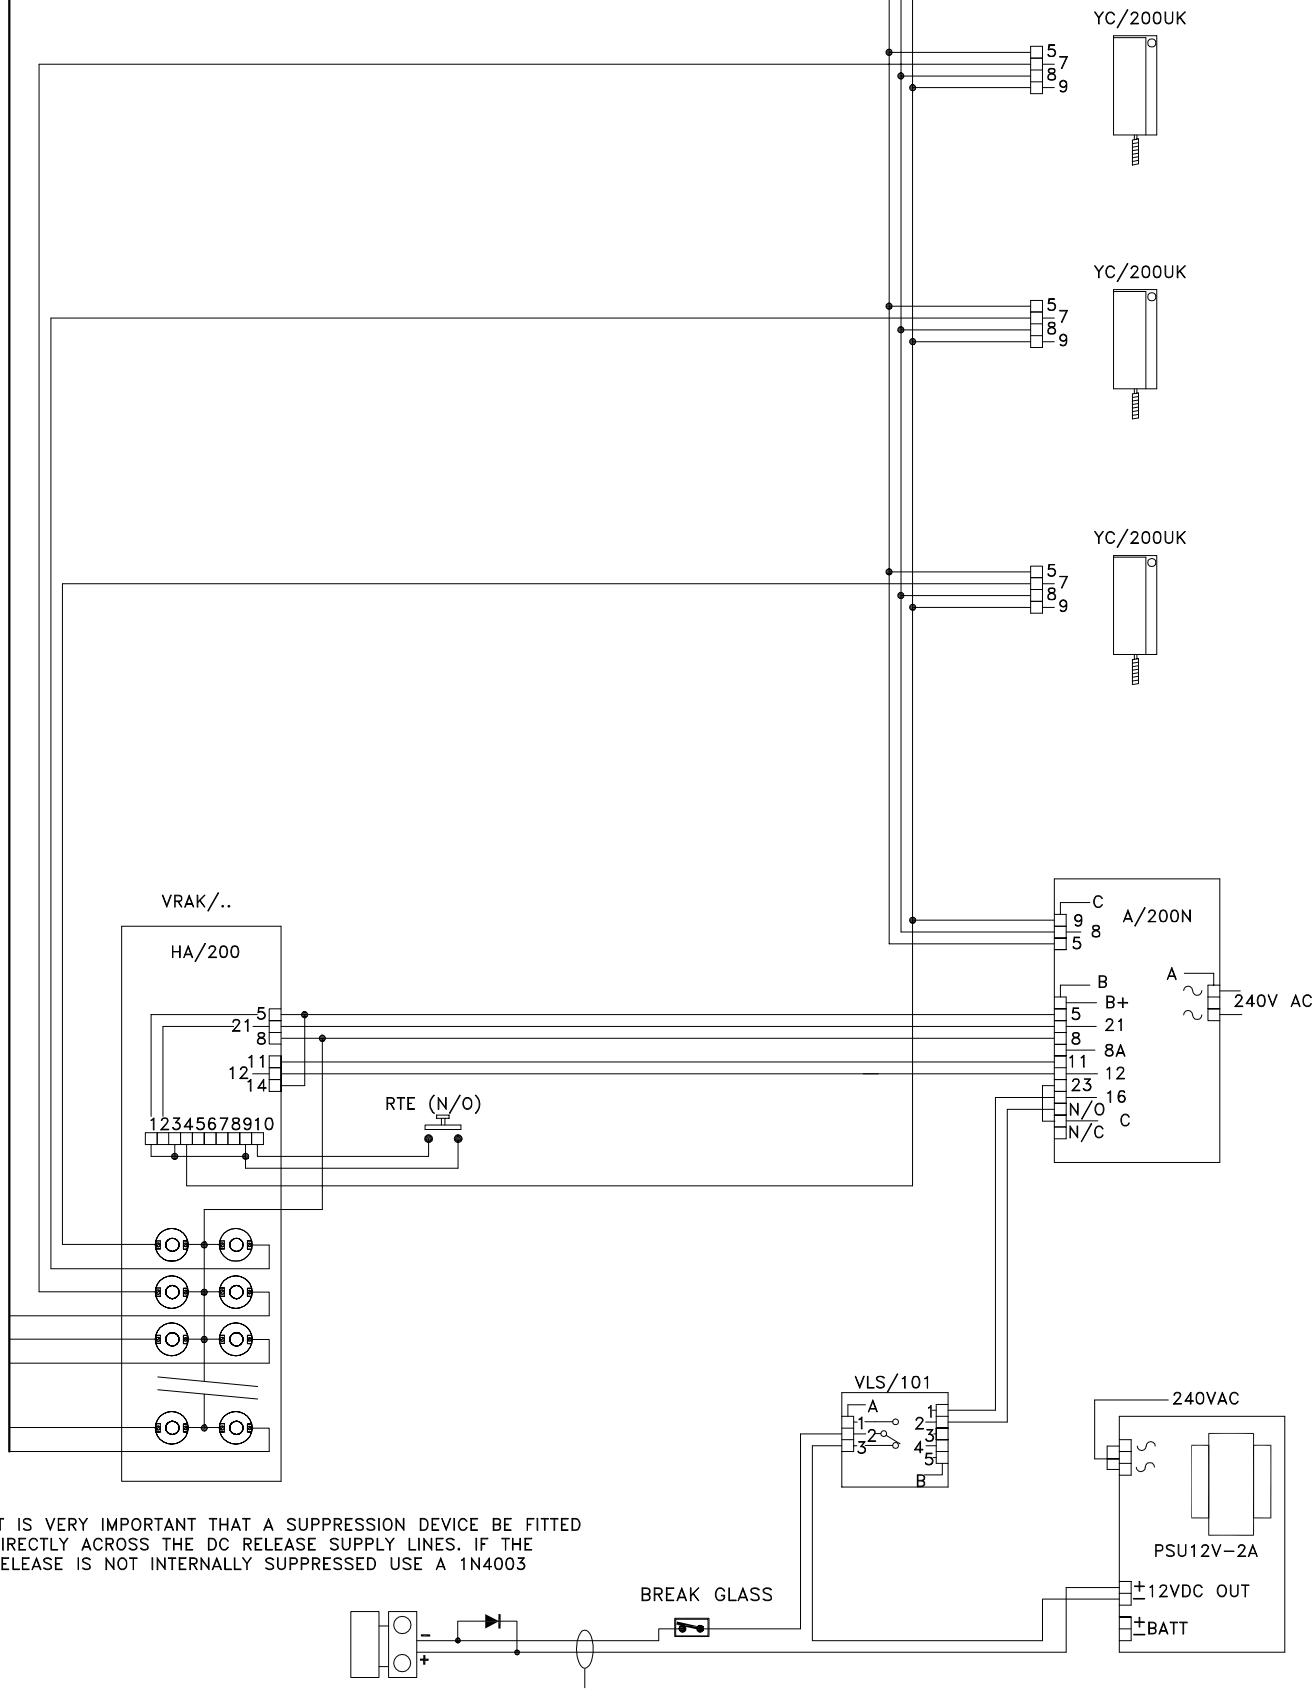

IT IS VERY IMPORTANT THAT A SUPPRESSION DEVICE BE FITTED  
DIRECTLY ACROSS THE DC RELEASE SUPPLY LINES. IF THE  
RELEASE IS NOT INTERNALLY SUPPRESSED USE A 1N4003

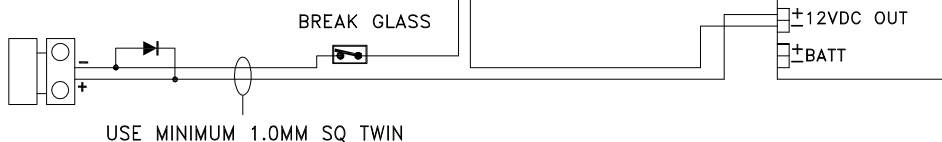

BPT (UK) LTD. HERTS. ENGLAND	PREPARED FOR INSTALLER INFORMATION	DATE: 11/07/05	DRAWN:RC
		REVISED:	
DRAWING TITLE:		DRAWING No: E-NV1YNUK(A)	