


NOTE:  
THIS DRAWING INDICATES AND ASSUMES THE USE OF  
A MINIMUM OF 0.5MM CSA PER CORE.

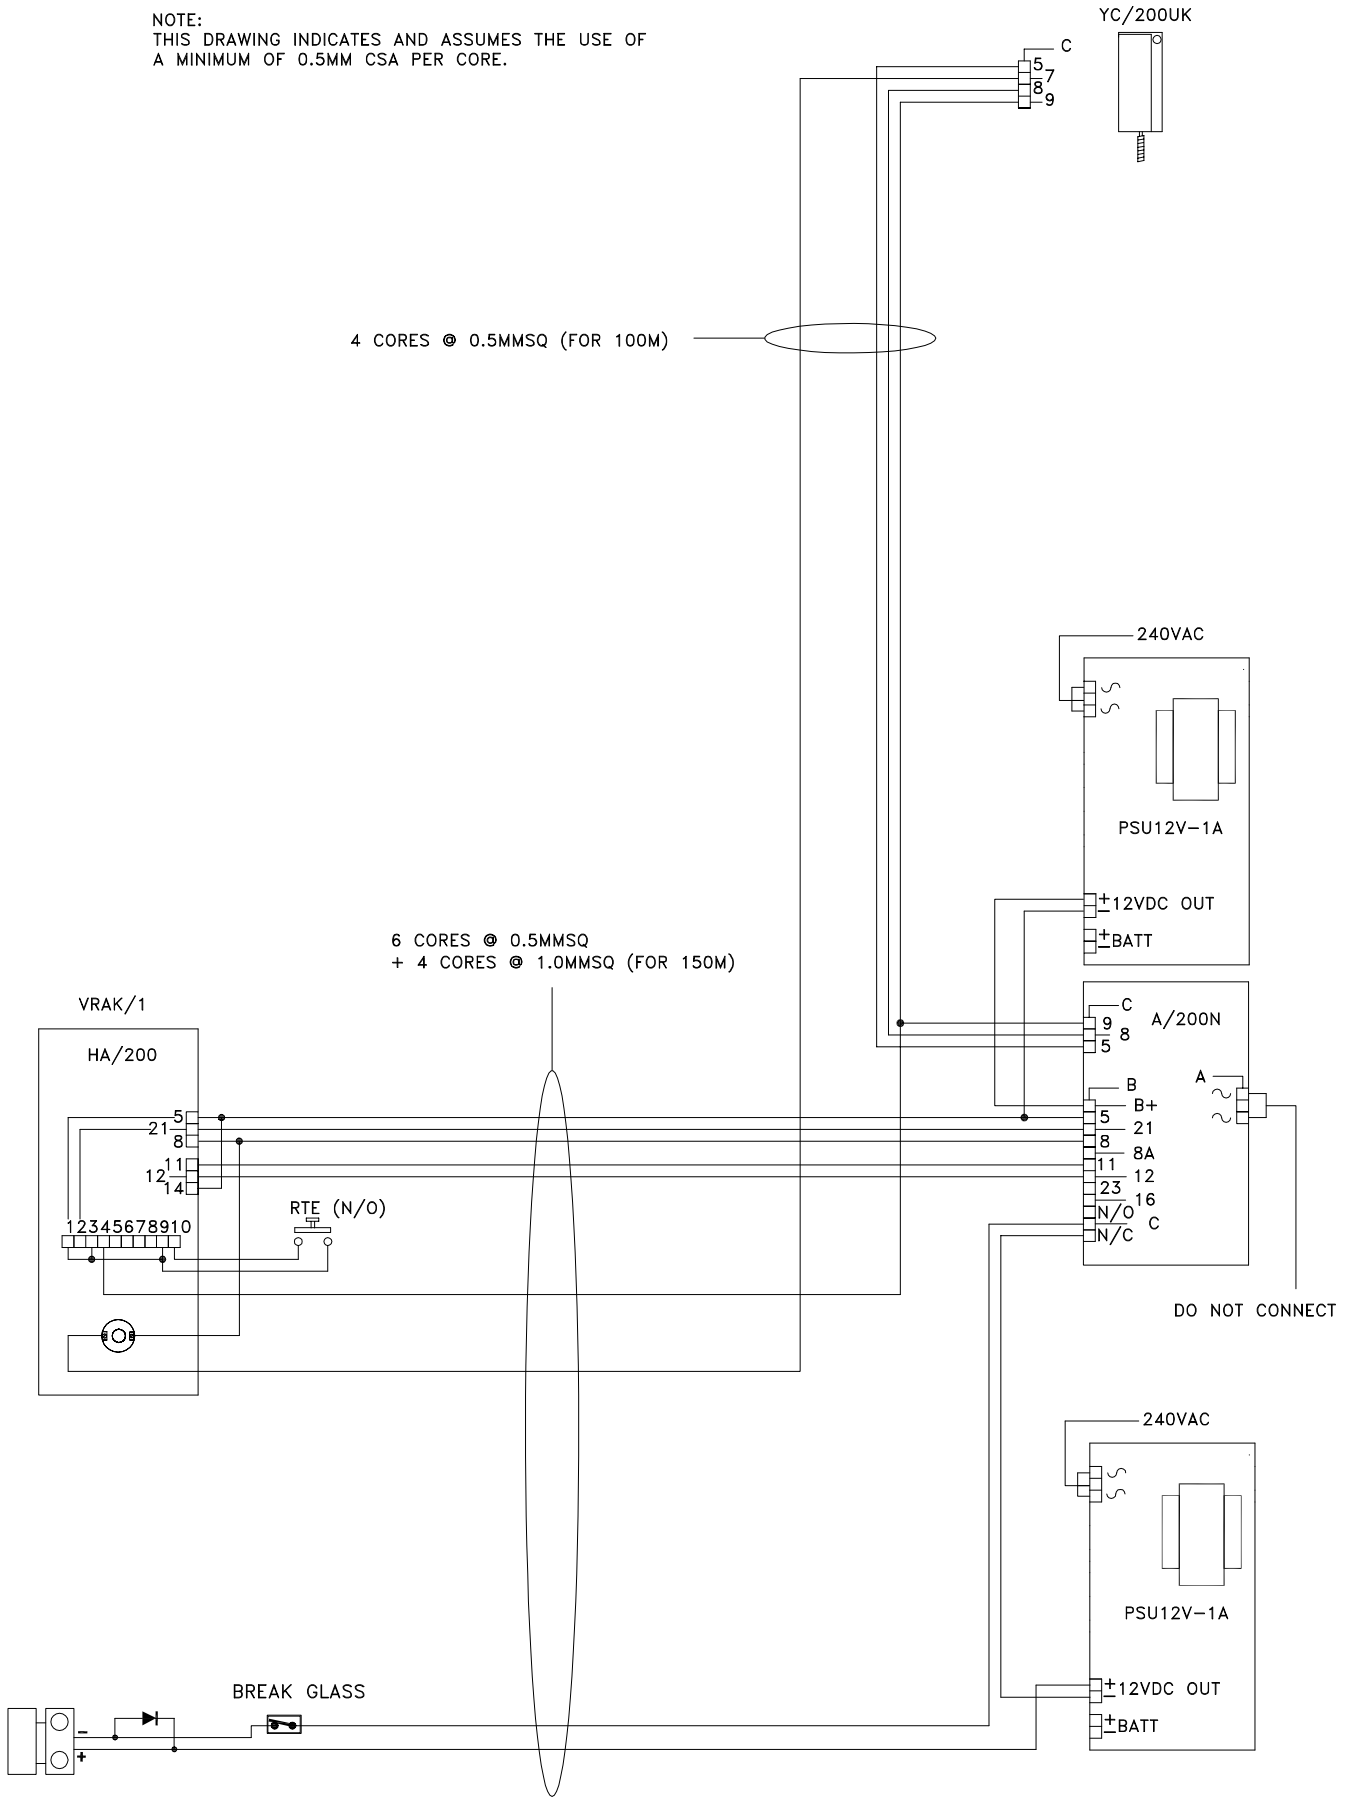

IT IS VERY IMPORTANT THAT A SUPPRESSION DEVICE BE FITTED  
DIRECTLY ACROSS THE DC RELEASE SUPPLY LINES. IF THE  
RELEASE IS NOT INTERNALLY SUPPRESSED USE A 1N4003

BPT (UK) LTD. HERTS. ENGLAND	PREPARED FOR INSTALLER INFORMATION	DATE: 24/03/05	DRAWN:RC
		REVISED:	
DRAWING TITLE: 1 X 1 BUTTON VR AUDIO ENTRY PANEL WITH KEYPAD, MAGNET, BATTERY BACK UP & 1 LYNEA HANDSET		DRAWING No: E-1V1Y1UKBB	