


YC/200UK

1 CORE @ 0.5MMSQ PER CALL BUTTON ON PANEL.

8 CORES @ 0.5MMSQ
+ 4 CORES @ 1.0MMSQ (FOR 150M)

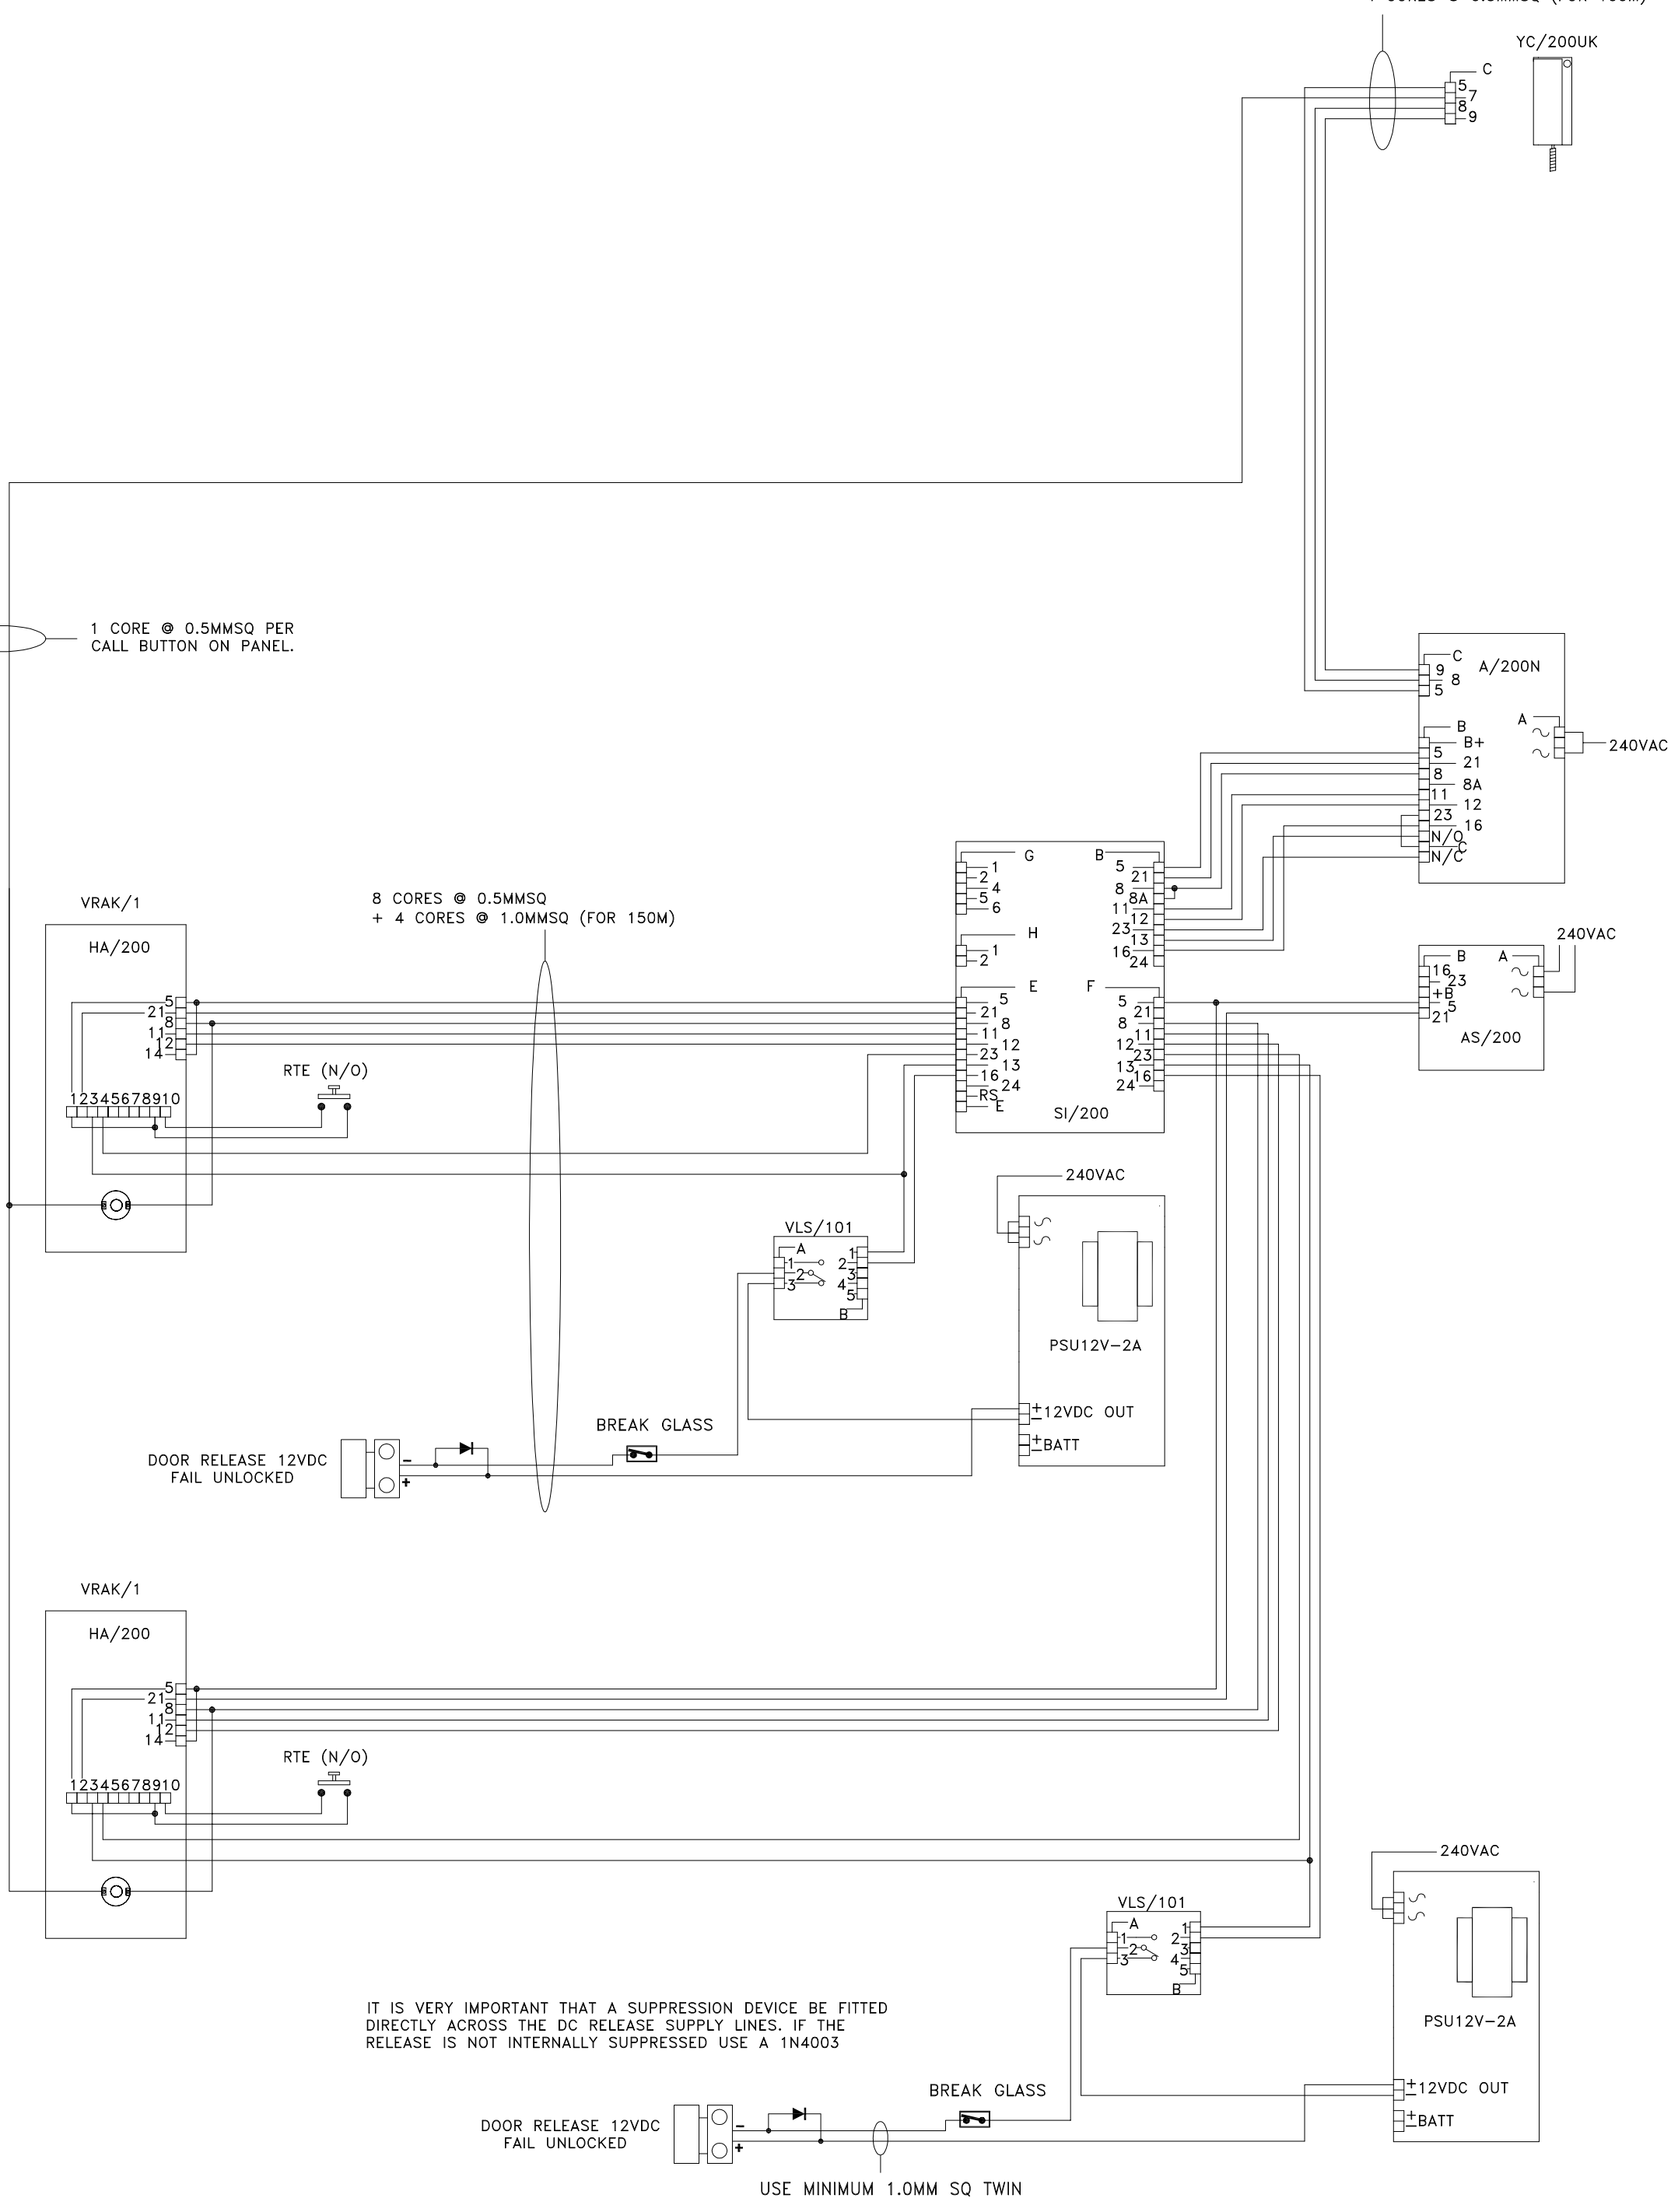

IT IS VERY IMPORTANT THAT A SUPPRESSION DEVICE BE FITTED DIRECTLY ACROSS THE DC RELEASE SUPPLY LINES. IF THE RELEASE IS NOT INTERNALLY SUPPRESSED USE A 1N4003

USE MINIMUM 1.0MM SQ TWIN

BPT (UK) LTD. HERTS. ENGLAND	PREPARED FOR INSTALLER INFORMATION	DATE: 28/03/06	DRAWN:RC
		REVISED:	
DRAWING TITLE:	SINGLE HOUSE INSTALLATION USING 2 VR AUDIO ENTRY PANELS WITH KEYPADS & MAGLOCKS	DRAWING No: E-1V2Y1UK(A)	