WRAPAROUND ELECTRIC **STRIKE**

Standard features include

High Security Stainless steel one part body and striker

Holding Force 1,350kg (3,000lb) - factory tested

Face Plate 3mm thick stainless steel wrap around face plate and anti-tamper fixings 316 grade brushed finish

Deep Jaw Accepts 19.05mm latch bolt

Dual Monitoring as Standard Solenoid and latch 3 amp change over contacts

Compact Shallow Body 30mm overall depth

Low Current Consumption 175mA - 12v DC continuous (±15%) 88mA - 24v DC continuous (±15%)

Patented Locking System

Shear line technology - incorporating 3 case hardened locking pins

Spares

Solenoid kits - 12v DC and 24v DC Replacement Pin kit

Approvals

CE approved BS EN 50081-1 and BS EN 50082-1

5 Year Guarantee






The TRIMEC ES3500 series are High Security monitored wrap around Strikes designed for use on timber or metal applications using integral or surface mount gap guards.



UNIQUE TO

ES3500 - Specifications

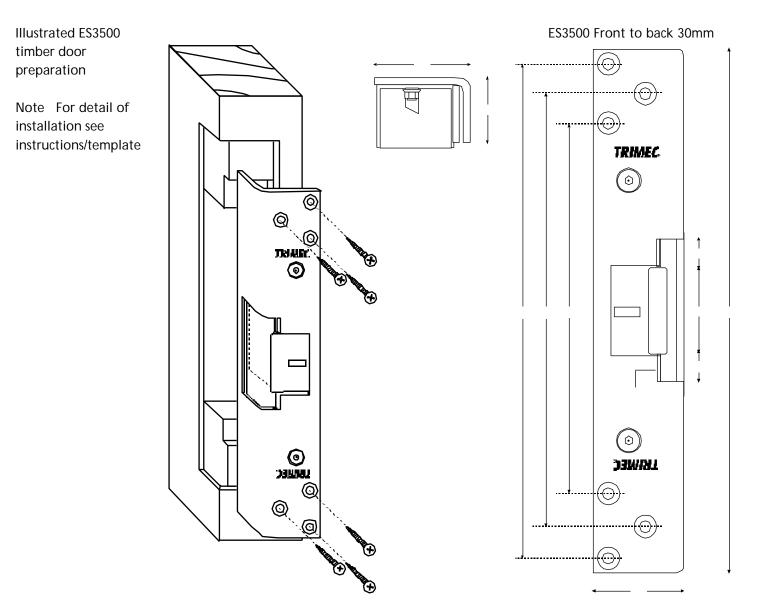

Lock Co	ompatability	Accepts	19.05mm latch bolt when fitted with 3mm door gap
Adams-Rite	e - 4710, 4720, 4750	Legge	- 8767, E900
ASSA	 3059, 3061, 3062, 8516, 8517, 8518, 	Union	 2332, 2341, 2370, 2379
	8519, 8760, 8761, 8762, 8764	Viro	8516, 8517, 8518, 8519
Chubb	- 3R35	Yale	- 3600, 3610, 4103, 6025, 6070

Ordering Information					
DESCRIPTION	FUNCTION	CODE	FUNCTION	CODE	
Monitored 12v DC 24v DC	Fail Open - Power to Lock Fail Open - Power to Lock	TS3501 TS3503	Fail Secure - Power to Open Fail Secure - Power to Open	TS3502 TS3504	
Solenoid Kit	Replacement 12v DC	CK200-12	Replacement 24v DC	CK200-24	
Pin Kit	Replacement	ES2P			



Telephone01202676262Facsimile01202680101E-mailiec.uk@pobox.comWeb sitewww.iecltd.co.ukINTERNATIONAL ENGINEERING COMPANY LIMITED



Harwell Road Nuffield Estate Poole Dorset BH17 0BD Great Britain Certificate No. RS 00117